



**KOYKER MANUFACTURING**

1-800-456-1107 • [www.siouxsteel.com](http://www.siouxsteel.com)

# Loaders

Loaders And Mounts To  
Fit Your Tractor

# Attachments

A Variety Of Options  
For Your Loader





**KOYKER MANUFACTURING IS**

**ENGINEERING  
ITS PRODUCTS  
TO OFFER  
THE LATEST  
IN DESIGN  
AND  
EFFICIENCY.**

**Koyker Manufacturing History**

In the late 1950's, Sioux Steel purchased the number one auger manufacturer, Koyker Manufacturing Company, which was located in Hull, Iowa. In the 1980's, Sioux Steel relocated it's Hull, IA facility, and its product lines to the Lennox, SD plant location. Most recently, Koyker Manufacturing has expanded its product line to offer FlexStor grain bagging equipment and much more.



**LEGEND**

Innovative Solutions  
Manufactured By A  
Family-Owned Company  
With Over A Century's  
Worth Of Experience

KOYKER MFG PRODUCTS ARE  
**MADE IN THE USA**

### Buy Parts Online

No other product can match our quality and durability, while offering the most common sense solution for farm equipment.

Moving parts on equipment may need to be replaced during the life of the machinery. Get the most out of your equipment by completing safety checks, maintenance checks and replacing necessary parts.

Find commonly ordered parts online at [www.agpartsdirect.com](http://www.agpartsdirect.com)

**BUY CYLINDER PARTS** 

### Stay Connected With Us

Curious about our latest news and events? Want to learn more about our new and existing products? A complete Koyker Manufacturing experience awaits when you join our social media community.



- ▶ *Loaders*
- ▶ *Pro Loaders*
- ▶ *Legend Loaders*
- ▶ *Grapples*
- ▶ *Pallet Forks*
- ▶ *Bale Spears*
- ▶ *Grain Bagging Equipment*
- ▶ *Online Store for Farm Equipment Parts & Accessories*



| <b>LOADER MODEL</b>    | <b>TRACTOR HORSEPOWER RANGE</b> | <b>MAXIMUM PRESSURE</b> | <b>RAISING/ LOWERING TIME</b> | <b>MAXIMUM LIFT HEIGHT TO PIVOT PIN</b> | <b>LIFT CAPACITY MAXIMUM HEIGHT AT PIVOT PIN</b> | <b>LIFT CAPACITY TO MAXIMUM HEIGHT 50-160 MODELS: 19.7" 180-2785 MODELS: 31.5" FORWARD OF PIVOT PIN</b> |
|------------------------|---------------------------------|-------------------------|-------------------------------|---|--|---|
| <b>50</b>              | 10-25                           | 2000 PSI                | 3/2 sec.                      | 5 ft. 10 in.                            | 700 lbs.   | 470 lbs.  |
| <b>80</b>              | 12-25                           | 2200 PSI                | 3/2 sec.                      | 6 ft.                                   | 960 lbs.   | 700 lbs.  |
| <b>120</b>             | 14-30                           | 2200 PSI                | 4/2 sec.                      | 7 ft. 1 in.                             | 1250 lbs.  | 850 lbs.  |
| <b>125</b>             | 14-30                           | 2200 PSI                | 4/2 sec.                      | 7 ft. 1 in.                             | 1250 lbs.  | 850 lbs.  |
| <b>140</b>             | 15-30                           | 2200 PSI                | 4/3 sec.                      | 7 ft. 10 in.                            | 1300 lbs.  | 970 lbs.  |
| <b>145<sup>A</sup></b> | 20-45                           | 2200 PSI                | 3/2 sec.                      | 8 ft. 5 in.                             | 1320 lbs.  | 990 lbs.  |
| <b>145<sup>B</sup></b> | 20-45                           | 2200 PSI                | 4/3 sec.                      | 8 ft. 5 in.                             | 1810 lbs.  | 1350 lbs.   |
| <b>155<sup>A</sup></b> | 20-45                           | 2200 PSI                | 4/2 sec.                      | 8 ft. 5 in.                             | 1480 lbs.  | 1100 lbs.   |
| <b>155<sup>B</sup></b> | 20-45                           | 2200 PSI                | 5/3 sec.                      | 8 ft. 5 in.                             | 2030 lbs.  | 1500 lbs.   |
| <b>160<sup>A</sup></b> | 20-45                           | 2200 PSI                | 4/2 sec.                      | 8 ft. 5 in.                             | 1480 lbs.  | 1100 lbs.   |
| <b>160<sup>B</sup></b> | 20-45                           | 2200 PSI                | 5/3 sec.                      | 8 ft. 5 in.                             | 2020 lbs.  | 1500 lbs.   |
| <b>180</b>             | 30-60                           | 2200 PSI                | 4/3 sec.                      | 9 ft. 6 in.                             | 2470 lbs.  | 1610 lbs.   |
| <b>185</b>             | 30-60                           | 2200 PSI                | 4/3 sec.                      | 9 ft. 6 in.                             | 2470 lbs.  | 1610 lbs.   |
| <b>185<sup>B</sup></b> | 30-60                           | 2200 PSI                | 3/2 sec.                      | 9 ft. 6 in.                             | 1890 lbs.  | 1220 lbs.   |
| <b>190</b>             | 30-60                           | 2200 PSI                | 4/3 sec.                      | 9 ft. 6 in.                             | 2470 lbs.  | 1610 lbs.   |
| <b>195<sup>C</sup></b> | 30-60                           | 2200 PSI                | 4/3 sec.                      | 9 ft. 6 in.                             | 2470 lbs.  | 1610 lbs.   |
| <b>195<sup>B</sup></b> | 30-60                           | 2200 PSI                | 3/2 sec.                      | 9 ft. 6 in.                             | 1890 lbs.  | 1220 lbs.   |
| <b>220</b>             | 30-75                           | 2200 PSI                | 5/3 sec.                      | 10 ft. 2 in.                            | 2750 lbs.  | 1800 lbs.   |
| <b>235</b>             | 30-80                           | 2200 PSI                | 5/3 sec.                      | 10 ft. 7 in.                            | 2640 lbs.  | 1740 lbs.   |
| <b>245</b>             | 30-80                           | 2200 PSI                | 5/3 sec.                      | 10 ft. 7 in.                            | 2640 lbs.  | 1740 lbs.   |
| <b>310</b>             | 45-90                           | 2500 PSI                | 5/3 sec.                      | 11 ft. 7 in.                            | 3590 lbs.  | 2430 lbs.   |
| <b>315</b>             | 45-90                           | 2200 PSI                | 5/3 sec.                      | 11 ft. 3 in.                            | 3200 lbs.  | 2170 lbs.   |
| <b>345</b>             | 45-90                           | 2500 PSI                | 5/3 sec.                      | 11 ft. 7 in.                            | 3590 lbs.  | 2430 lbs.   |
| <b>385</b>             | 45-90                           | 2500 PSI                | 6/4 sec.                      | 11 ft. 5 in.                            | 3325 lbs.  | 2290 lbs.   |
| <b>445</b>             | 60-115                          | 2500 PSI                | 5/3 sec.                      | 12 ft.                                  | 3720 lbs.  | 2575 lbs.   |
| <b>510</b>             | 60-160                          | 2500 PSI                | 7/5 sec.                      | 12 ft. 10 in.                           | 5540 lbs.  | 3850 lbs.   |
| <b>545</b>             | 80-135                          | 2500 PSI                | 5/3 sec.                      | 12 ft. 11 in.                           | 4200 lbs.  | 2930 lbs.   |
| <b>585</b>             | 90-180                          | 2500 PSI                | 5/3 sec.                      | 13 ft. 7 in.                            | 5360 lbs.  | 3735 lbs.   |
| <b>645</b>             | 90-200                          | 2500 PSI                | 6/5 sec.                      | 14 ft. 6 in.                            | 6780 lbs.  | 4830 lbs.   |
| <b>785</b>             | 145-275                         | 2900 PSI                | 6/4 sec.                      | 15 ft. 6 in.                            | 7035 lbs.  | 4960 lbs.   |
| <b>1545</b>            | 80-135                          | 2500 PSI                | 4/3 sec.                      | 12 ft. 10 in.                           | 5380 lbs.  | 4200 lbs.   |
| <b>1585</b>            | 90-180                          | 2500 PSI                | 4.8/3.4 sec.                  | 13 ft. 7 in.                            | 5216 lbs.  | 3607 lbs.   |
| <b>2585</b>            | 90-180                          | 2500 PSI                | 5/3 sec.                      | 13 ft. 7 in.                            | 5067 lbs.  | 3527 lbs.   |
| <b>2785</b>            | 145-275                         | 2900 PSI                | 6/4 sec.                      | 15 ft. 6 in.                            | 6320 lbs.  | 4500 lbs.   |

A= 1 3/4" Cylinders      B= 2" Cylinders      C= 2 1/4" Cylinders  
 \*\* All dimensions conform to ASAE standards. All dimensions depend on make, size and model of tractor and safety of operation. Specifications subject to change and/or improvement with notice.



**FARM EQUIPMENT PARTS**  
[www.agpartsdirect.com](http://www.agpartsdirect.com)

**SHOP KOYKER PARTS ONLINE!**

Search local dealerships or buy direct online. MSRP product pricing featured along with additional product information.

# A VARIETY OF MODELS AVAILABLE! SEE COMPLETE LISTINGS ON OPPOSITE PAGE



## ALL KOYKER LOADERS ARE MANUFACTURED IN LENNOX, SD, USA

Koyker loaders are designed, engineered and built in the USA. They are built to handle big loads while the self-storing stands allow for quick mounting and dismounting.

# KOYKER LOADER FEATURES

Front end loaders for all major tractor brands:

- John Deere
- Kubota
- McCormick
- New Holland
- Case IH

Features available on most loader models. Contact Koyker Manufacturing for more details.

- Quick Attach Mounting
- Solid Knee Joint Strength
- Self-Storing Parking Stand
- Fast Attaching Buckets
- Grapple Forks
- Dual Torque Tubes
- Easy On/Off Attachments

# 2 YEAR WARRANTIES

LIMITED WARRANTY FOR NEW KOYKER MANUFACTURING COMPANY PRODUCTS. The warranties described below are provided by Koyker to the original purchasers of new products purchased from Koyker or from an authorized Koyker Dealer (the "Products"). Under these warranties, Koyker will, at its option, repair or replace at its factory any Product covered under these warranties which is found to be defective in material and workmanship during the applicable warranty term or refund the purchase price paid for the defective Product. Customer will be responsible for labor charges for removing the defective Product and reinstalling the repaired or replacement Product, any premium charge for overtime labor requested of Koyker and shipping charges to and from Koyker's factory. These warranties are not transferrable. Subject to exclusions and limitations.





## THE PRODUCTS

For years, Koyker Manufacturing Company of Lennox, South Dakota, has provided the farm loader industry with innovative ideas for a more efficient and dependable means of material handling.


Now, with the increasing popularity of the MFWD (Mechanical Front Wheel Drive) tractors, Koyker has again met the challenge and provided the market with a loader that will allow the efficient use of these tractors in material handling. The Koyker line of products provides you with state-of-the-art design and innovation for your on-farm handling chores. Features such as quality construction, ease of maintenance, and high performance operating capacities, all at a low price, make Koyker products some of the most efficient ever. With proper care and handling, it will provide many years of dependable service.

# ATTACHMENTS FOR LOADERS

## BALE SPEARS

### FEATURES


- Singles Have 2200 LBS Capacity
- Doubles Have 4400 LBS Capacity
- Fully Tapered Tines Allow For Easier Penetration and Withdrawal
- Tapered Socket Provides Support For Spear
- Standard 4 Tine Square Bale Spear Has The Option Between 39" or 48" Tines
- Fast On-Off System

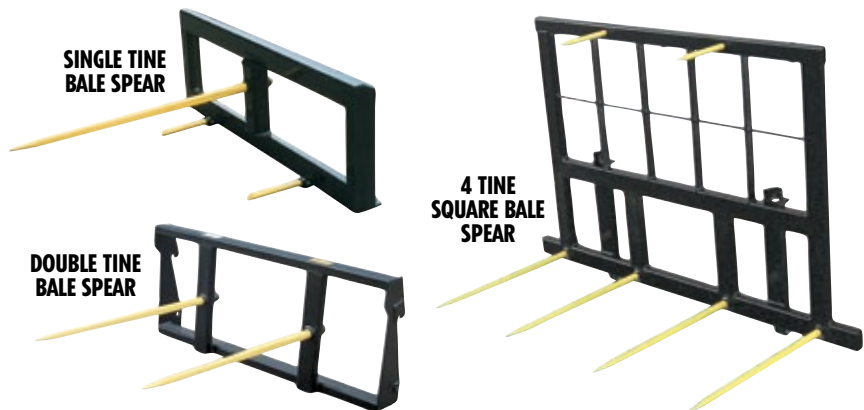

## PALLET FORKS

### FEATURES

- Change Attachments Quickly
- Attachments Install in Minutes
- Increased Versatility
- Lower Attachment Cost

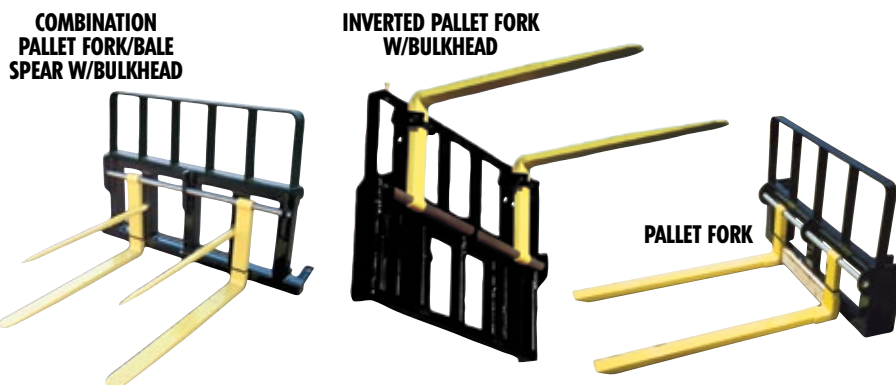

## PALLET FORKS WITH TELESCOPIC BOOM

### FEATURES

- 5500 LBS Capacity
- Solid Pallet Fork Tines
- Adjustable Width 8" to 55"
- Bulkhead Height 38"
- Bulkhead Constructed of 1/4" High Tensile Steel Tubing
- Boom Adjust To 5 Different Lengths In 8" Increments



## CAUTION



**CAUTION** - Be sure stabilizer spike is in place when handling large round hay bales with fork-type equipment.

**CAUTION** - A heavy load can cause your tractor to tip over. When moving heavy loads, keep the load as close to the ground as possible, go slowly around turns, and be sure the front and rear of tractor is properly counterbalanced with weights.

**CAUTION** - The operator is responsible for the safety of themselves and others when operating equipment.





# LEGEND



KOYKER 385 LOADER



LEGEND 740 LOADER



KOYKER 2785 LOADER



**FARM EQUIPMENT  
PARTS**  
[www.agpartsdirect.com](http://www.agpartsdirect.com)

**SHOP KOYKER PARTS ONLINE!**

Download Koyker Loader Manuals online at  
[www.siouxsteel.com](http://www.siouxsteel.com) for your specific loader model parts.

W: [www.siouxsteel.com](http://www.siouxsteel.com) // T: 1-800-456-1107 // E: [info@siouxsteel.com](mailto:info@siouxsteel.com)

