



BALERS

Vermeer®



HOW THE BIG, ROUND BALER CHANGED THE INDUSTRY THAT FEEDS AND FUELS THE WORLD

“Find a need, fill that need with a product built to last and simply build the best.” These words were famously spoken by Vermeer founder Gary Vermeer, who made a name for himself by designing products that transformed industries and helped shape new ones altogether. Products that proved there is always a better way to get the job done.

It began when a local cattle producer told Gary he was getting out of the cattle business because the hay-making process was labor intensive and he could no longer do it alone. That was when Gary decided a one-person system was needed. First chalked out on the Vermeer factory floor, Gary and his team knew their round hay baler design was something big. And was it ever. Introduced in 1971, the “big, round baler,” as it was known in the industry, allowed hay producers to make hay bales almost 10 times bigger than any other baler on the market. Perhaps more importantly, it turned a process that traditionally required multiple people into a one-person job. Finally, hay producers could single-handedly put up high volumes of hay in shorter periods of time.

This was only the beginning.

Vermeer has been steadfast in its commitment to help hay and forage producers find better ways to make hay. With a team carrying on Gary’s spirit of innovation and deep passion for agriculture, we are in continuous pursuit of ways to improve our equipment to meet the needs of the industry. What we do every day helps make a real impact on our customers’ operations. We are committed to producers — whether they put up a few hundred or tens of thousands of round bales to feed their cattle.

These producers excel at harvesting crops for haying, feeding and bedding to help nourish a healthy and vibrant food supply, as well as harvesting crop residues to support the biomass industry. At Vermeer, we tip our caps to the hay producers who play such an invaluable role in feeding and fueling the world.

In 2017, we again reinvented the way our producers work. The ZR5-1200 self-propelled baler — the first of its kind — marked the beginning of a new era in haymaking. From the patented independent suspension system that delivers a smooth, comfortable ride to the one-step baling automation process that operators perform with the push of a button, the ZR5-1200 bucks the trend.

But the work doesn’t stop there. Vermeer and its robust network of independent dealers will continue to provide unwavering support to Vermeer hay producers and their equipment day in, day out. Vermeer dealers are passionate about agriculture — especially the hay and forage industry. They know Vermeer round balers as well as anybody because when they go home, many of them harvest their own crops too. Who better to provide service and support for Vermeer hay tools than those who use the equipment themselves?

The big, round baler forever changed the way we make hay, helping hay producers do more with less. It has inspired innovation across the industry. How we handle, store and feed hay — everything has changed. And still today, Vermeer is focused in the field because the more things change, the more Vermeer can help hay producers stay ahead of the times and be Equipped to Do More®.



TABLE OF CONTENTS:

| | |
|---------------------------------------|-------------|
| 504 R-series balers overview | pg. 4 - 5 |
| 504R Classic baler | pg. 6 - 7 |
| 504R Signature baler | pg. 8 - 9 |
| 504R Premium baler | pg. 10 - 11 |
| Atlas™ and Atlas Pro™ control systems | pg. 12 - 13 |
| 604 R-series balers overview | pg. 14 - 15 |
| 604R Classic baler | pg. 16 - 17 |
| 604R Signature baler | pg. 18 - 19 |
| 604R Premium baler | pg. 20 - 21 |
| 605N balers | pg. 22 - 23 |
| Pro balers overview | pg. 24 - 25 |
| 504 and 604 Pro G4 balers | pg. 26 - 27 |
| Rancher 6650 baler | pg. 28 |
| Bale packaging | pg. 29 |
| Product specifications | pg. 30 - 39 |



504 R-SERIES BALERS

Vermeer 504 R-series balers offer simplicity, ease of use and more unique features than ever before.

504R Classic baler: With minimal setup required to get in the field, and at an economical price point, this is the full-time baler for the part-time operator.

504R Signature baler: The Signature name says it all. Offering a blend of convenience, ease of use and durability, this baler advances the Gary Vermeer legacy of round balers with expert engineering and innovative technology.

504R Premium baler: A high-output, silage-ready baler with advanced technology provides a first-class baling experience. This baler is meant for the serious producer ready to put up some serious crop.

| FEATURE | 504R CLASSIC | 504R SIGNATURE | 504R PREMIUM |
|---------------------------|-----------------------|---------------------------|---------------------------|
| Bale shape indicators | Optional | Standard | Standard |
| Moisture sensors | Optional | Standard | Standard |
| Auto Lube greasing system | NA | NA | Optional |
| Silage kit | NA | Optional | Standard |
| Control system | Atlas™ control system | Atlas Pro™ control system | Atlas Pro™ control system |



Bale shape indicators



Moisture sensors




Auto Lube greasing system



Silage kit



Atlas™ control system




Atlas Pro™ control system

504 R-SERIES BALERS





504R CLASSIC **BALER**



Atlas™ control system



OPTIONAL
Bale shape indicators



OPTIONAL
Moisture sensors

1 A low recommended PTO of 50 hp (40 kW) provides options for various tractors.

2 The Atlas™ control system delivers robust performance with simplicity in an intuitive package. A 4.3-in (11-cm) color touch screen displays everything needed to bale and allows operators to track field statistics, bales per hour and average bale size. Optional features include the ability to see bale shape and real-time moisture readings on the display.



3 Built with few moving parts, the 60-in (150-cm) 4-bar camless wide pickup gets the job done and helps minimize parts cost when it is time for routine maintenance.



4 Durable chains and heavy-duty components on the inside of this baler, including strong driveshafts, make it built to last.

5 An optional netwrap system makes net efficient to feed and operate. Compared to twine, using netwrap helps increase bale wrapping speed, keep the bale shape and minimize hay loss in storage.



6 The durable windguard roller helps smooth out the crop before it enters the pickup, and the rotor helps force the crop into the back of the chamber for bale formation.


504R SIGNATURE **BALER**



Bale shape indicators



Moisture sensors




Atlas Pro™ control system



OPTIONAL Silage kit

1 A 5-bar camless wide pickup with no cam tracks or follower bearings allows for smoother, quieter operation compared to previous models. This durable pickup is equipped with steel coil teeth for baling tough or heavy crops and features fewer moving parts to help reduce maintenance and prolong the life of the machine.

2 The Atlas Pro™ control system helps operators control the outcome of the bale from the convenience of the cab, including bale shape, bale size and number of wraps. Monitor real-time stats like bale count and moisture levels for up to 50 fields.

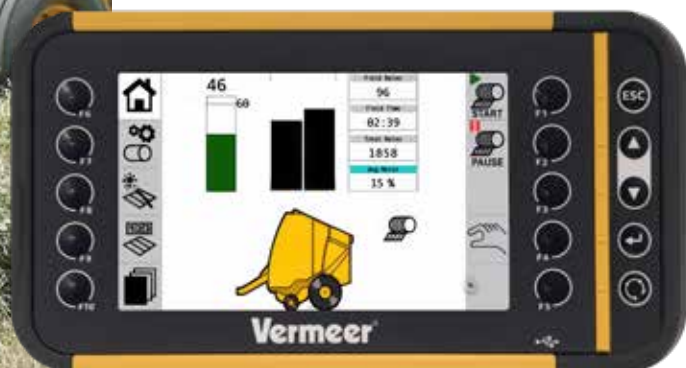

3 The three main drive chains are made with 80 diamond chains to help minimize chain maintenance. The upper and lower drive bearings have a 33% higher load rating while the clutch's maximum torque rating is 32% higher than on previous models.

4 An aggressive rotor helps to create positive bale starts while the auger and feeding system force crop into the chamber and onto the rotating belts for bale formation.

504R PREMIUM BALER




Bale shape indicators



Moisture sensors



Silage kit




Atlas Pro™ control system




OPTIONAL
Auto Lube greasing system


1 The 60-in (150-cm) 5-bar camless wide pickup has fewer moving parts to help minimize maintenance and parts cost when compared to a cammed pickup. After the steel windguard roller smooths out the windrow, the hay enters the baler and is forced back to the chamber by an aggressive rotor.

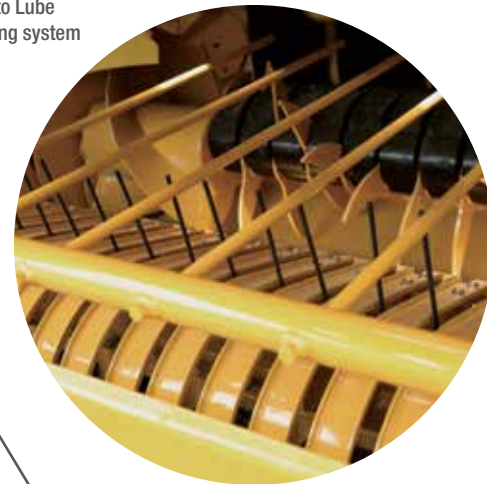

2 The Atlas Pro™ control system helps operators control the outcome of the bale from the convenience of the cab including bale shape, bale size and number of wraps. Monitor real-time stats like bale count and moisture levels for up to 50 fields.

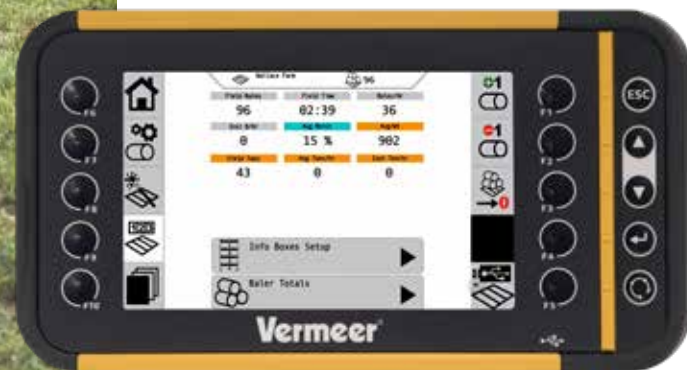

3 Standard grease banks make it convenient for operators to perform routine maintenance on the baler to help prolong machine life. An optional Auto Lube greasing system is available to provide automatic lubrication to critical bearings at user-defined intervals set through the Atlas Pro control system.

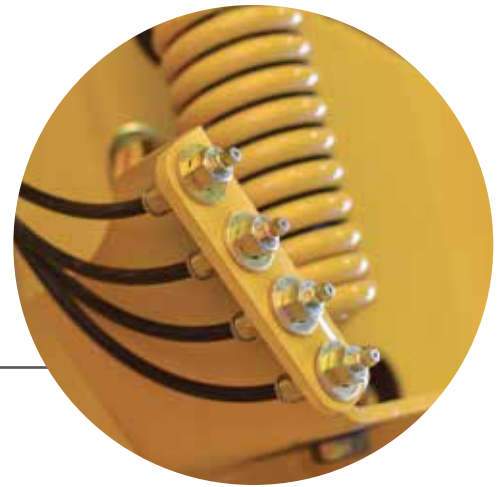

4 Meant for those who want to bale high-moisture crops at a quick, efficient pace, the 504R Premium baler can out bale other 504 R-series balers. Starting with the increased pickup speed and ending with a faster tie cycle than the 504R Signature baler, this baler can handle the intense pace of a full-time operator producing 5-ft x 4-ft (1.5-m x 1.2-m) bales.

5 The 504R Premium comes with a standard silage kit, ready to put up wet hay. With heavy-duty components and an option for endless belts, this baler is rugged and ready to handle the rigors of baling heavy crop.

6 The optional flotation tires offer a smooth ride on rough terrain and stability on hills. Flotation tires can reduce the amount of stress on the baler and can also minimize compaction on the land.



ATLAS™ AND ATLAS PRO™ CONTROL SYSTEMS

Using the Atlas™ or Atlas Pro™ control system from Vermeer classifies operators as pros in the hay business. Serving as operators' in-cab consultants, these control systems provide real-time operational information, advanced field statistics and a large range of diagnostic capabilities, along with the basic field and bale statistics operators expect.




ACTUAL SIZE

1 Intuitive navigation allows operators to adjust settings, read bale statistics and review diagnostic screens.

2 Bale-size and bale-shape indicators keep operators informed in the field. Gain quick access to multiple settings and calibration functions by touching different graphics directly on the screens.

3 Use the netwrap gauge to see how much netwrap is left on the current roll. Operators can also adjust net tension using the Atlas and Atlas Pro control system.*

4 Keep track of real-time bale data and field-average statistics, including bale count, bales per hour, moisture, field names and more.

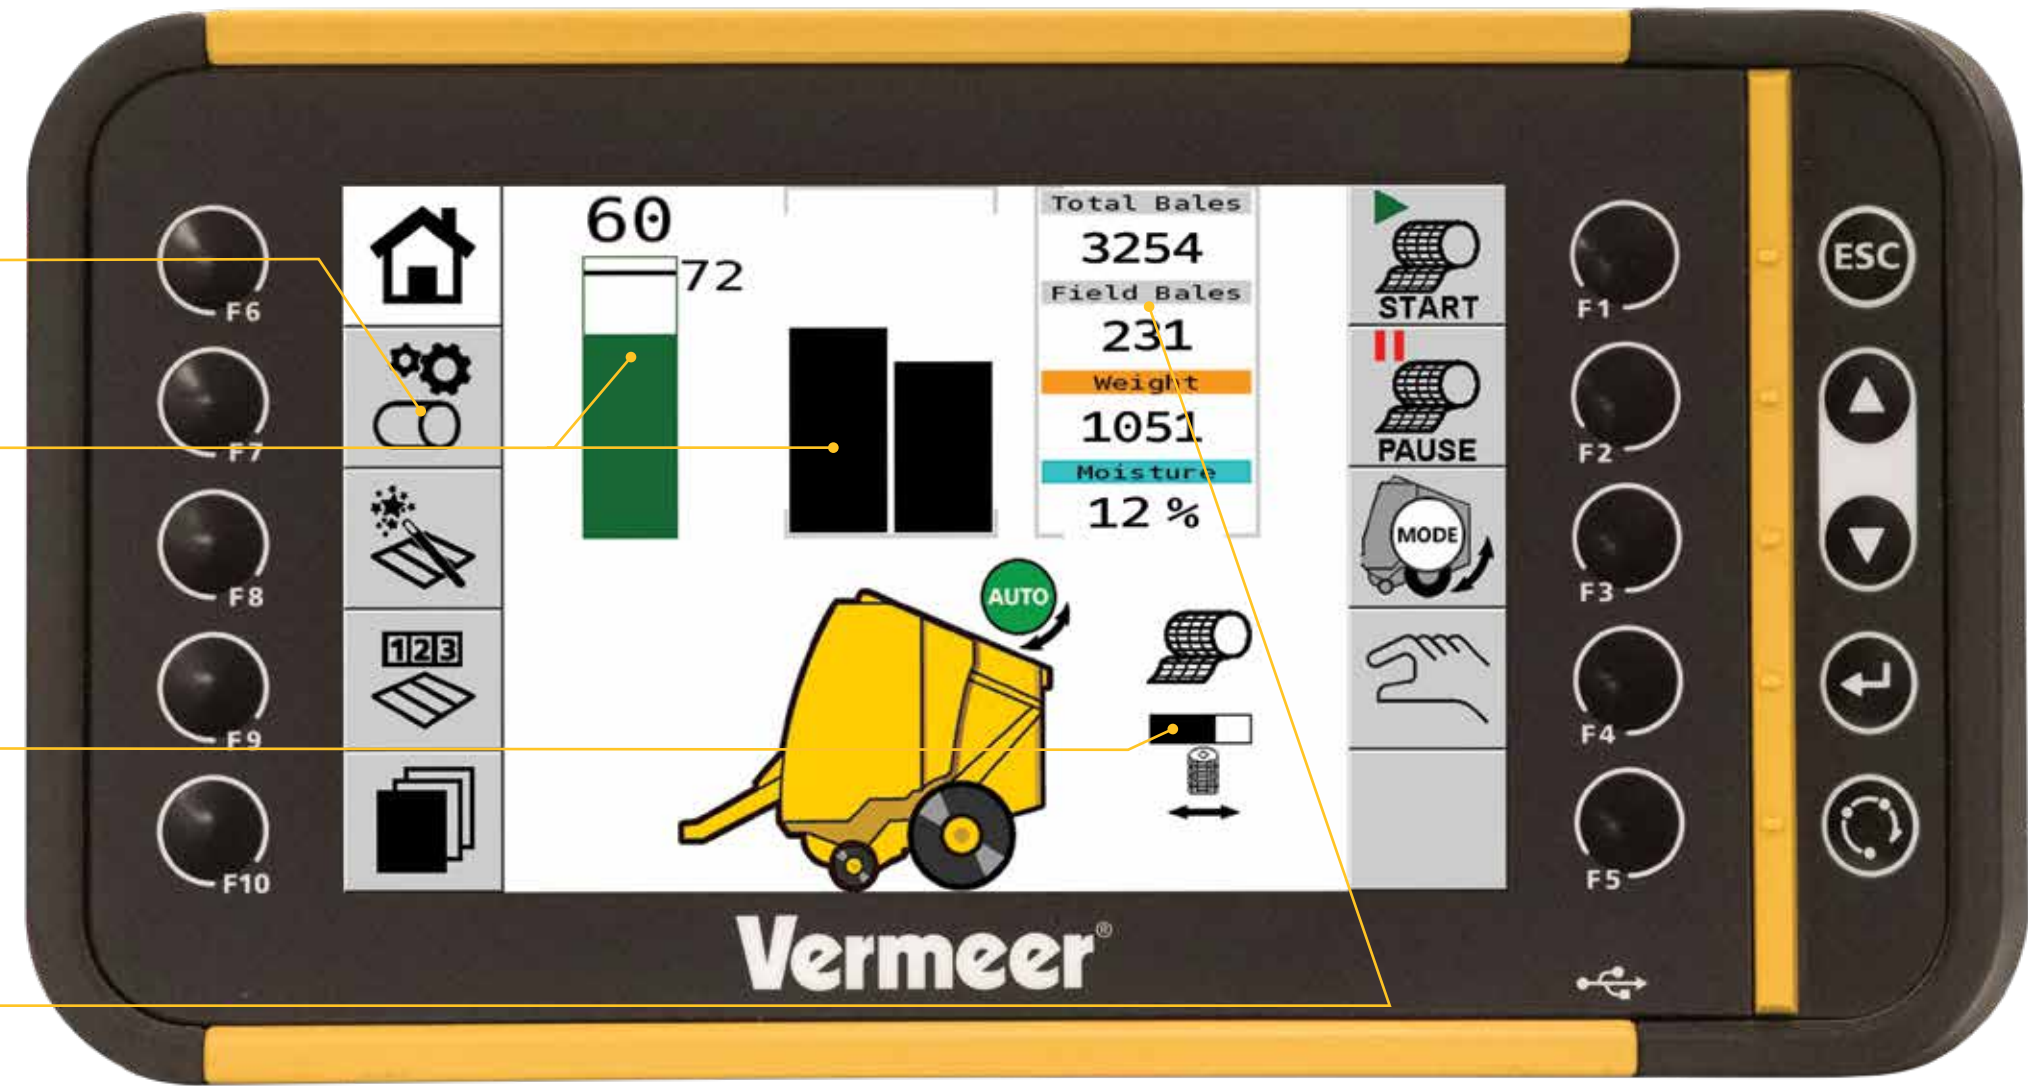

ACTUAL SIZE

604 R-SERIES BALERS

We all want consistent, square-shouldered bales — but with operation and field condition differences, we don't all put up hay the same way. Rest assured, Vermeer has a baler for various types of operations with the 6-ft x 4-ft (1.8-m x 1.2-m) baler lineup — 604 R-series balers. Common features include a camless pickup, hydraulic density system and netwrap system.

604R Classic baler: This baler is ideal for those who like minimal setup and have low horsepower requirements. User-friendly controls and the option to bale with netwrap or twine make this baler a classic fit for small-to-midsize operations that want to get the job done at an economical price.

604R Signature baler: This baler is designed and built for many hay and forage applications. It's equipped with smart features, like the Atlas Pro™ control system, that bring convenience to operations.

604R Premium baler: For a high-producing haymaker, the 604R Premium is the way to go. With an increase in baling speed and capacity compared to the 604R Signature, it can also produce an up to 30% denser bale than the 604R Classic and Signature.

| FEATURE | 604R CLASSIC | 604R SIGNATURE | 604R PREMIUM |
|---------------------|-----------------------|---------------------------|---------------------------|
| Net lift system | Optional | Optional | Standard |
| Bale density output | Standard | Standard | 30% increase |
| Silage kit | NA | Optional | Standard |
| Control system | Atlas™ control system | Atlas Pro™ control system | Atlas Pro™ control system |




Net lift system




Moisture sensors



Silage kit



Atlas™ control system



Atlas Pro™ control system

604 R-SERIES BALERS





604R CLASSIC BALER



Bale shape indicators



Atlas™ control system



OPTIONAL
Net lift system



OPTIONAL
Moisture sensors

- 1 A low recommended PTO of 60 hp - 80 hp (40 - 60 kW) allows operators to hook it up to most tractors.
- 2 Track field statistics — such as bales per hour and bales per field — on the Atlas™ control system's 4.3-in (11-cm) color touch screen display as well as additional metrics with optional moisture and standard bale-shape sensors. A netwrap gauge works like a gas gauge, letting the operator know how much netwrap is available.



- 3 The Vermeer 3-year pickup coverage* service contract covers the internal components and includes parts and labor on the 604R Classic baler. See a Vermeer dealer for details.



- 4 The netwrap system gives operators the ability to control net tension from the cab via the Atlas control system and maximizes net spread over the edge of the bale. An actuator feeds and cuts the netwrap while a hydraulic brake manages net tension.



- 5 The 70-in (180-cm), 4-bar camless wide pickup features durable steel coil teeth and few moving parts — including no cams or follower bearings — to minimize maintenance.


604R SIGNATURE **BALER**



Moisture sensors



Bale shape indicators



Atlas Pro™ control system



OPTIONAL Net lift system



OPTIONAL Silage kit

1 Rubber-mounted pickup teeth help with durability and tooth life. With a 5-bar camless wide pickup, the 604R Signature baler has an increased number of tines compared to previous models to help get more crop into the baler and leave less crop in the field.



2 The Atlas Pro™ control system helps operators control the outcome of the bale from the convenience of the cab, including shape, density and net tension. Monitor real-time stats — like bale weight, bale count and moisture levels for up to 50 fields.



3 Moisture sensors come standard on 604R Signature and 604R Premium balers and allow operators to view real-time moisture readings in the cab via the control system. Knowing the bale moisture level can help with making management decisions, such as whether or not to keep baling or let the crop dry, or whether to wrap the hay or apply preservatives.*



4 The latest netwrap system on 604 R-series balers is designed to help maximize the amount of net spread over the edge of the bale. An actuator is responsible for feeding and cutting the netwrap, and the hydraulic brake manages the netwrap tension. The netwrap system feeds the net directly onto the main belts of the baler. Smart features allow the operator to control netwrap tension from the cab, on a scale of 0 to 100. A sensor measures the amount of net left on the roll, which is displayed on a digital gauge within the Atlas Pro control system in the operator's cab. Over-the-edge net spread and appropriate netwrap tension help maintain square-shouldered bales.

5 With an available silage kit, operators will have the flexibility to bale both dry and higher-moisture hay. Optional on the 604R Signature and standard on the 604R Premium.

604R PREMIUM BALER



Net lift system




Moisture sensors



Silage kit




Bale shape indicators




Atlas Pro™ control system

1 604R Premium baler belts spin faster than the 604R Signature baler. This allows hay to enter the chamber faster and the bale to tie quicker, allowing operators to finish fields in short order, all thanks to the increased capacity.

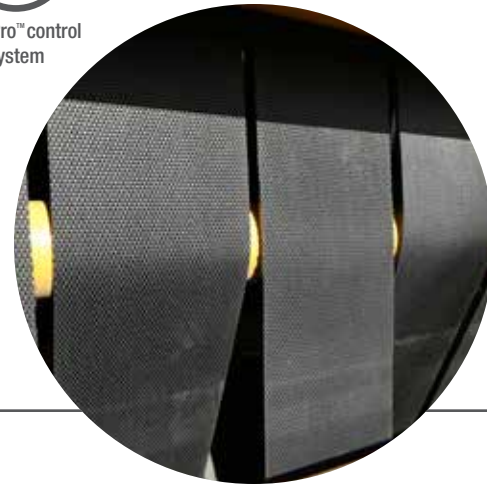

2 The Atlas Pro™ control system allows operators to control the bale density level right from the cab. In fact, the 604R Premium can produce bales up to 30% more dense when compared to 604R Classic and Signature balers.

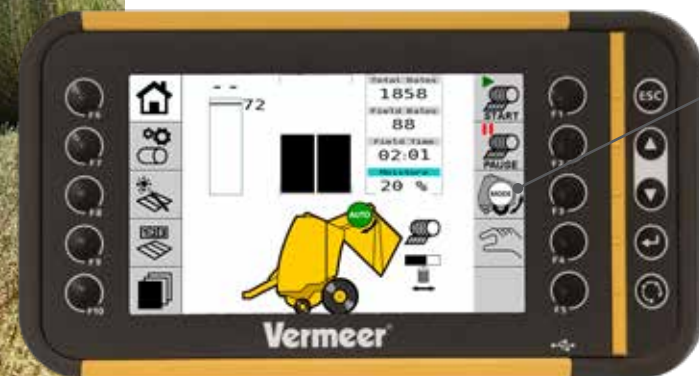

3 The auto-eject system is designed to work on a variety of different tractors. With ease of use in mind, this baler can open and close the tailgate without operator assistance, reducing two steps of the process.*



4 An industry-first net lift system lifts the roll from either the truck or ground into the baler's netwrap system using an electric thumb control.


5 The steel doors are sleek and strong. Plus, flotation tires contribute to a smooth ride and help to minimize field compaction. Heavy-duty chains, rollers, bearings, poly-pickup bands and rubber mounted teeth provide added strength.

*Tractor hydraulic detent is required.

605N BALER AND 605N CORNSTALK SPECIAL BALER

Vermeer N-series balers are built with heavy-duty components for strength and durability in the field when operators need them most. Smart features like the available automatic pickup clutch and Auto Lube greasing system help extend machine life. Plus, they're backed by one of the best distribution networks in the industry.

1 Direct crop feed enables forage to be fed directly to the bottom drum and bale-starting chamber.

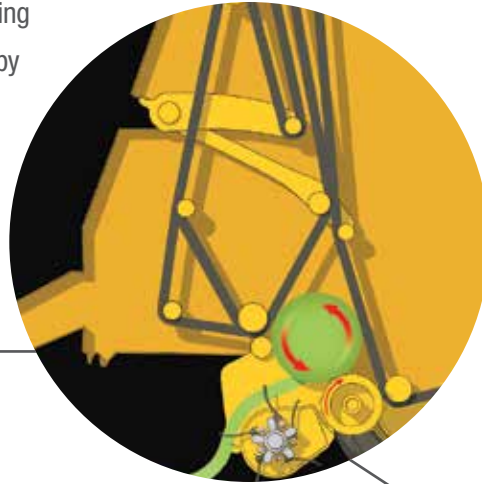

2 The E-Link Pro display can show bale weight and moisture readings on the home screen with standard moisture sensors and an optional scale kit. Additionally, the E-Link Pro display comes with the ability to keep track of information for up to 20 customers, with up to 10 fields per customer.



3 Optional Auto Lube greasing system, controlled through the E-Link Pro display, provides automatic lubrication to critical bearings at user-defined intervals.



4 The optional pickup clutch automatically stops the pickup when the desired bale size is reached, minimizing inadvertent overfill of the bale chamber to help protect the rollers, bearings and belts.*

5 Seals on either side of the pickup bushings help keep out dirt and dust. The toolless gauge wheel adjustment allows for efficient pickup height adjustments.

9 DIFFERENCES


THAT SET THE 605N CORNSTALK SPECIAL APART FROM THE 605N BALER

| FEATURE | 605N CORNSTALK SPECIAL |
|---------------------------|------------------------|
| POWERED WINDGUARD | ✓ |
| EXTENDED LUBE DRIVELINE | ✓ |
| O-RING CHAINS | ✓ |
| WORK LIGHTS | ✓ |
| FIRE EXTINGUISHER | ✓ |
| AUTO LUBE GREASING SYSTEM | ✓ |
| SCALE | ✓ |
| EXTENDED WARRANTY | ✓ |
| INLINE® RAMP | Optional |

PRO BALERS

Reap the benefits of silage. Avoid the hassles. The Vermeer Pro G4 Baler was engineered with versatility, durability and ease of use in mind to produce premium fodder for your animals. With a 17-knife chopping system, a convenient and quick netwrap system and smart features like the Atlas Pro™ control system, the Pro G4 Balers were built to work — not wait on the weather.

| FEATURE | 504 PRO G4 | 604 PRO G4 |
|------------------------|---------------------------|---------------------------|
| Bale ramp | Spring-loaded | Spring-loaded |
| Bale shape indicators | Standard | Standard |
| Grease bank | Standard | Standard |
| Control system | Atlas Pro™ control system | Atlas Pro™ control system |
| LED maintenance lights | Optional | Optional |



Atlas Pro™ control system



Bale shape indicators



Drop floor




Chopping system



PRO BALERS

504 AND 604 PRO G4 BALERS



Atlas Pro™ control system



Bale shape indicators



Drop floor



Chopping system



1 Baling tough crops? No problem. A 540 rpm or 1,000 rpm PTO tie into a split gearbox, running the pickup on one side and the chamber on the other, to help spread the load to both sides of the baler and allow for the use of a cutout clutch to help with longevity and torque.



2 Spend more time baling hay and less time clearing out your pickup. The unique geometry of the poly riser stripper bands promotes crop stripping and minimizes pickup wrapping.




3 Choose your preferred cut length for optimizing bale density, silage quality, feed mixing time and digestibility with a 17-knife chopping system. Select eight or nine knives from Atlas Pro™ control system for a moderate cut length, all 17 knives for maximum processing, or lower both knife banks to bale without chopping.

4 Load and route netwrap with ease at the back of the baler with a rear-load netwrap system. Spread net edge to edge and adjust netwrap tension from the cab on a scale of 0 to 100 to maximize spread over the edges, depending on the type of netwrap. Plus, the net gauge on the Atlas Pro control system keeps track of how much net is left on the roll so you can focus on the windrow ahead of you.

5 The last thing anyone wants to do is clear a plug from the pickup. The drop floor flexes during baling to help crop flow into the chamber with ease. If a plug does occur, operators can clear a plug from the cab with confidence by using tractor hydraulics to lower the floor, allowing crop to pass through so they can get back to baling.

6 Control the outcome of the bale from the convenience of the cab with the Atlas Pro control system. Monitor real-time bale and crop statistics and adjust based on moisture, crop and customer preference for up to 50 fields. Plus, control features like the knife banks, drop floor and net tension, all without ever leaving the seat.

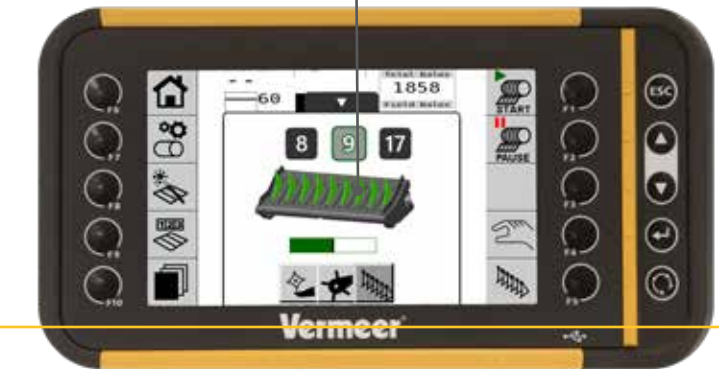



RANCHER 6650 BALERS

Vermeer Rancher balers are economically priced and designed to match up with lower horsepower tractors commonly used in cow-calf operations.

1 Haysaver wheels are a proven, reliable performer over millions of acres. A specially formed, long-finger design gives operators positive raking action, minimizes bounce in rugged terrain and offers a clean wide sweep of the field.

2 The radial pin clutch provides protection at the pickup for durability and reliability.

3 Features on the Bale Expert™ monitor — like Auto-Start Advance; standard moisture sensing; left and right bale shape indicators; bale count reporting; near-full, full-bale, and tailgate lock alarms — give operators information, control, and convenience.



4 The optional netwrap system feeds net directly to the main belts of the baler. The brake tension/friction design helps maximize the number of wrapped bales per roll. A spiral roller provides full bale coverage on every rotation, even at the start of the wrap cycle.

MORE THAN ONE WAY TO PACKAGE A BALE

Vermeer balers are built to consistently make good-looking bales in optimal time. To accomplish this task, a key component is the wrapping technology that operators choose. Vermeer offers three types of bale packaging — plastic film, twine and netwrap — to meet operator's haymaking needs.

Plastic film

Maintain quality forage and nutrition for up to 12 months with the superior strength and airtight seal of plastic film. The reflective white material provides ultraviolet protection for outdoor storage. With a minimum film thickness of 1 mil (25 micron), bales can stand a chance against unpredictable weather and unwanted pests. Endcaps are also available.

Twine

Vermeer offers **three twine options** including sisal, plastic and solar degradable.

Extra-long **sisal twine** boasts strong fibers to aid in consistent trouble-free baling. Sporting continuous filaments within the plastic, monofilament baler twine has become the industry standard.

With their tight, brightly colored polypropylene spiral, **plastic twine**-wrapped bales can be stored outdoors for up to 18 months without significant deterioration.

With the degradability of sisal twine and the durability of plastic twine, **solar-degradable twine** can provide a more custom solution for any operation.

Vermeer® Net


Available for 4-ft and 5-ft (1.2-m and 1.5-m) balers of all kinds, Vermeer Net is the choice for strength and reliability. With nine size options to choose from, there's a roll size to fit each baler and operational need. The black, white and green bale wrap color scheme signifies some really tough netwrap.

| VERMEER NET SIZES | |
|-------------------|--------------------|
| ROLL WIDTH | ROLL LENGTH |
| 48 in (121.9 cm) | 5,000 ft (1,524 m) |
| 48 in (121.9 cm) | 9,840 ft (3,000 m) |
| 51 in (129.5 cm) | 5,000 ft (1,524 m) |
| 51 in (129.5 cm) | 9,840 ft (3,000 m) |
| 53 in (134.6 cm)* | 9,840 ft (3,000 m) |
| 64 in (162.6 cm) | 7,000 ft (2,133 m) |
| 64 in (162.6 cm) | 8,800 ft (2,682 m) |
| 67 in (170.1 cm) | 7,000 ft (2,133 m) |
| 67 in (170.1 cm) | 8,000 ft (2,438 m) |




BALE SHAPE

Choosing Vermeer Net isn't just about improving bale appearance. It's an investment that helps protect the time and energy put into growing forage. Above all else, it's a statement that says the nutritional quality of bales is something worth protecting.



NET SPREAD

Little net stretch with optimum net spread covers square-shouldered bales from one side to the other.



TIME SAVED

When using netwrap, two to three turns of the bale are necessary for an ideal bale wrap, compared to using twine, which requires at least eight revolutions. That equates to savings in time, labor, fuel and materials.



VERSATILITY

Vermeer Net can be used when baling wet and dry hay. Nine different sizes are available. Don't own a yellow baler? No problem — Vermeer Net fits most balers.



STACKABILITY

Bales wrapped with Vermeer Net often keep their shape better and have squarer shoulders — making them more visually appealing, more efficient to stack and better able to withstand handling and hauling.



STRENGTH

Strong netwrap, like Vermeer Net, can keep the bale wrapped tight. Tight and dense bales create improved water-shedding capabilities for reduced hay loss while storing hay.

| SPECIFICATION | 504R CLASSIC BALER | 504R SIGNATURE BALER | 504R PREMIUM BALER |
|------------------------------------|---|--|--|
| BALE SIZE | | | |
| Bale diameter | 36 in - 60 in (91 cm - 150 cm) | 36 in - 60 in (91 cm - 150 cm) | 36 in - 60 in (91 cm - 150 cm) |
| Bale width | 47 in (120 cm) | 47 in (120 cm) | 47 in (120 cm) |
| Maximum bale weight | 1,000 lb (450 kg) | 2,000 lb (910 kg) | 2,000 lb (910 kg) |
| DIMENSIONS AND WEIGHTS | | | |
| Length standard | 156 in (396 cm) | 156 in (396 cm) | 156 in (396 cm) |
| Length with net | 173 in (439 cm) | 173 in (439 cm) | 173 in (439 cm) |
| Length with ramp | 169 in (429 cm) | 169 in (429 cm) | 169 in (429 cm) |
| Height | 107 in (272 cm) | 107 in (272 cm) | 111 in (282 cm) |
| Width with standard tires | 100 in (254 cm) | 100 in (254 cm) | 100 in (254 cm) |
| Tires | Standard: 11L-15; Optional: 31 x 13.5-5 | Standard: 31 x 13.5-5; Optional: 480-45 R17 flotation tire | Standard: 31 x 13.5-5; Optional: 480-45 R17 flotation tire |
| Weight fully optioned | 5,260 lb (2,390 kg) | 5,400 lb (2,450 kg) | 5,460 lb (2,480 kg) |
| BALE FORMING CHAMBER | | | |
| Drive roller size | 4.78 in (12.1 cm) | 4.78 in (12.1 cm) | 4.78 in (12.1 cm) |
| Idler roller size | 3.5 in (8.9 cm) | 3.5 in (8.9 cm) | 3.5 in (8.9 cm) |
| Start roller size | 4.5 in (11 cm) | 4.5 in (11 cm) | 4.5 in (11 cm) |
| Belt type | Standard mini rough top | Standard mini rough top | Premium mini rough top or endless |
| Number of belts | 5 | 6 | 6 |
| Width of belt | 6.8 in (17 cm) | 6.8 in (17 cm) | 6.8 in (17 cm) |
| Length of belt (long) | 455 in (1,160 cm) | 455 in (1,160 cm) | 455 in (1,160 cm) |
| Length of belt (short) | 465 in (1,180 cm) | 465 in (1,180 cm) | 465 in (1,180 cm) |
| Type of lace | Alligator rivet | Alligator rivet | Alligator rivet or no laces (endless belts) |
| Silage kit | NA | Optional | Standard |
| DRIVE SYSTEM | | | |
| Driveline | 540 rpm, standard lube, radial pin clutch | 540 rpm, standard lube, friction clutch | 540 rpm, extended lube, friction clutch |
| Torque protection pickup | Radial pin clutch | Radial pin clutch | Radial pin clutch |
| Roller chains | Single 60 | Single 60 and 80 | Single 60 and 80 |
| Bearing and sprocket configuration | Round drive shafts and bearings | Round drive shafts and bearings | Round drive shafts and bearings |
| TRACTOR REQUIREMENTS | | | |
| PTO horsepower minimum | 40 hp (30 kW) | 45 hp (34 kW) | 55 hp (41 kW) |
| PTO horsepower recommended | 50 hp (40 kW) | 55 hp (41 kW) | 65 hp (48 kW) |

| SPECIFICATION | 504R CLASSIC BALER | 504R SIGNATURE BALER | 504R PREMIUM BALER |
|---------------------------------|---|--|--|
| PICKUP | | | |
| Pickup type | Camless wide | Camless wide | Camless wide |
| Width tooth to tooth | 60 in (150 cm) | 60 in (150 cm) | 60 in (150 cm) |
| Tooth bars | 4 | 5 | 5 |
| Number of teeth | (48) double steel coil | (60) double steel coil | (60) double steel coil |
| Teeth spacing | 2.8 in (7.1 cm) | 2.8 in (7.1 cm) | 2.8 in (7.1 cm) |
| Stripper bands | Steel | Steel | Poly |
| Flotation | Optional gauge wheels 4.8-16 HD semi-pneumatic with spring assist | Gauge wheels 4.8-16 HD semi-pneumatic with spring assist | Gauge wheels 4.8-16 HD semi-pneumatic with spring assist |
| Pickup lift | Manual standard, hydraulic optional | Manual standard, hydraulic optional | Hydraulic |
| 3-year pickup warranty | Standard | Standard | Standard |
| CONTROL SYSTEM | | | |
| Control system type | Atlas™ control system | Atlas Pro™ control system | Atlas Pro™ control system |
| Display | 4.3-in (11-cm) color touch screen | 7-in (18-cm) color touch screen | 7-in (18-cm) color touch screen |
| Field statistics | 10 fields | 50 fields | 50 fields |
| Field statistics download | NA | USB | USB |
| Bale shape indicators | Optional | Standard | Standard |
| Moisture | Optional up to 27% | Standard up to 27% | Standard up to 27% |
| Bales per hour | Standard | Standard | Standard |
| DENSITY | | | |
| Bale density adjustments | Standard manual through hydraulic relief valve | Standard manual through hydraulic relief valve | Standard manual through hydraulic relief valve |
| Density readings | Optional physical gauge | Physical gauge | Physical gauge |
| BALE TIE SYSTEM | | | |
| Twine system | Optional | Optional | Optional |
| Netwrap system | Optional | Optional | Standard |
| Net tension control | Via mechanical adjustment | Via mechanical adjustment | Via mechanical adjustment |
| Extra roll storage | Standard | Standard | Standard |
| FEATURES | | | |
| Bale ramp | Optional spring loaded | Optional spring loaded | Spring loaded |
| Auto Lube greasing system | NA | NA | Optional |
| Grease bank | NA | NA | Standard |
| Right-hand door | NA | Standard | Standard |
| LED maintenance lights | NA | NA | Optional |
| Fire extinguisher, safety chain | Optional | Optional | Optional |

| SPECIFICATION | 604R CLASSIC BALER | 604R SIGNATURE BALER | 604R PREMIUM BALER |
|------------------------------------|---|--|---|
| BALE SIZE | | | |
| Bale diameter | 36 in - 72 in (91 cm - 180 cm) | 36 in - 72 in (91 cm - 180 cm) | 36 in - 72 in (91 cm - 180 cm) |
| Bale width | 47 in (120 cm) | 47 in (120 cm) | 47 in (120 cm) |
| Maximum bale weight | 2,000 lb (910 kg) | 2,400 lb (1,100 kg) | 2,400 lb (1,100 kg) |
| DIMENSIONS AND WEIGHTS | | | |
| Length standard | 164 in (417 cm) | 164 in (417 cm) | 184 in (467 cm) |
| Length with net | 184 in (467 cm) | 184 in (467 cm) | 184 in (467 cm) |
| Length with ramp | 198 in (503 cm) | 206 in (523 cm) | 206 in (523 cm) |
| Height | 121 in (307 cm) | 121 in (307 cm) | 121 in (307 cm) |
| Width with standard tires | 101 in (257 cm) | 101 in (257 cm) | 115 in (292 cm) |
| Width with optional tires | NA | 115 in (292 cm) | NA |
| Tires | 14L-16.1 | Standard: 14L-16.1; Optional: 21.5L-16.1 flotation tire | 21.5L-16.1 flotation tire |
| Weight fully optioned | 6,820 lb (3,090 kg) | 7,280 lb (3,300 kg) | 8,020 lb (3,640 kg) |
| BALE FORMING CHAMBER | | | |
| Drive roller size | 5.5 in (14 cm) | 5.5 in (14 cm) | 5.5 in (14 cm) |
| Idler roller size | 3.5 in, 4.8 in (8.9 cm, 12 cm) | 3.5 in, 4.8 in (8.9 cm, 12 cm) | 3.5 in, 4.8 in (8.9 cm, 12 cm) |
| Start roller size | 5.3 in (13.5 cm) | 5.3 in (13.5 cm) | 5.3 in (13.5 cm) |
| Belt type | Standard mini rough top | Premium mini rough top | Premium mini rough top |
| Number of belts | 6 | 6 | 6 |
| Width of belt | 6.8 in (17 cm) | 6.8 in (17 cm) | 6.8 in (17 cm) |
| Length of belt (long) | 564 in (1,430 cm) | 564 in (1,430 cm) | 564 in (1,430 cm) |
| Length of belt (short) | 557 in (1,410 cm) | 557 in (1,410 cm) | 557 in (1,410 cm) |
| Type of lace | Alligator rivet | Alligator rivet | Alligator rivet |
| Silage kit | NA | Optional | Standard |
| DRIVE SYSTEM | | | |
| Driveline | 540 rpm, standard lube, friction clutch | Standard: 540 rpm, standard lube, friction clutch; Optional: 1,000 rpm, standard lube, automatic clutch | Standard: 540 rpm, standard lube, automatic clutch; Optional: 1,000 rpm, extended lube, automatic clutch |
| Torque protection pickup | Radial pin clutch | Radial pin clutch | Radial pin clutch |
| Roller chains | Single 60 and 80 | Single 60 and 80 | Single 80 and 100 |
| Bearing and sprocket configuration | Hex drive shafts and bearings | Hex drive shafts and bearings | Hex drive shafts and bearings |
| TRACTOR REQUIREMENTS | | | |
| PTO horsepower minimum | 60 hp (40 kW) | 70 hp (50 kW) | 85 hp (63 kW) |
| PTO horsepower recommended | 80 hp (60 kW) | 90 hp (70 kW) | 105 hp (78 kW) |

| SPECIFICATION | 604R CLASSIC BALER | 604R SIGNATURE BALER | 604R PREMIUM BALER |
|---------------------------------|--|--|--|
| PICKUP | | | |
| Pickup type | Camless wide | Camless wide | Camless wide |
| Width tooth to tooth | 70 in (180 cm) | 70 in (180 cm) | 70 in (180 cm) |
| Width on outside flair | 74 in (190 cm) | 74 in (190 cm) | 74 in (190 cm) |
| Tooth bars | 4 | 5 | 5 |
| Number of teeth | (56) double steel coil | (70) double rubber mounted | (70) double rubber mounted |
| Teeth spacing | 2.8 in (7.1 cm) | 2.8 in (7.1 cm) | 2.8 in (7.1 cm) |
| Stripper bands | Steel | Poly | Poly |
| Flotation | Gauge wheels 4.8 - 16 HD semi-pneumatic with spring assist | Gauge wheels 4.8 - 16 HD semi-pneumatic with spring assist | Gauge wheels 7.1 - 16 HD semi-pneumatic with spring assist |
| Pickup lift | Manual standard, hydraulic optional | Hydraulic | Hydraulic |
| 3-year pickup warranty | Standard | Standard | Standard |
| CONTROL SYSTEM | | | |
| Control system type | Atlas™ control system | Atlas Pro™ control system | Atlas Pro™ control system |
| Display | 4.3-in (11-cm) color touch screen | 7-in (18-cm) color touch screen | 7-in (18-cm) color touch screen |
| Field statistics | 10 fields | 50 fields with names | 50 fields with names |
| Field statistics download | NA | USB | USB |
| Bale shape indicators | Standard | Standard | Standard |
| Moisture | Optional up to 27% | Standard up to 27% | Standard up to 27% |
| Bales per hour | Standard | Standard | Standard |
| Auto eject | NA | Optional | Standard |
| DENSITY | | | |
| Bale density adjustments | Standard through control system monitor | Standard through control system monitor | Standard through control system monitor |
| Density readings | Optional physical gauge | Digital gauge | Digital gauge |
| Cylinder size | 2.5 in (6.4 cm) | 2.5 in (6.4 cm) | 3 in (8 cm) for a 30% density increase |
| BALE TIE SYSTEM | | | |
| Twine system | Optional | Optional | Optional |
| Netwrap system | Optional | Optional | Standard |
| Net gauge via control system | Standard | Standard | Standard |
| Net tension control | Via control system | Via control system | Via control system |
| Net lift system | Optional | Optional | Standard |
| Extra roll storage | Standard | Standard | Standard |
| FEATURES | | | |
| Bale ramp | Optional spring loaded | Hydraulic | Hydraulic |
| Auto Lube greasing system | NA | Optional | Standard |
| Grease bank | NA | Standard | NA |
| Right-hand door | NA | Standard | Standard |
| LED maintenance lights | NA | Optional | Standard |
| Fire extinguisher, safety chain | Optional | Optional | Optional |
| Scale kit | NA | Optional | Optional |

| SPECIFICATION | 605N BALER | 605N CSS BALER |
|------------------------------------|---|---|
| BALE SIZE | | |
| Bale diameter | 36 in - 72 in (91 cm - 180 cm) | 36 in - 72 in (91 cm - 180 cm) |
| Bale width | 61 in (150 cm) | 61 in (150 cm) |
| Maximum bale weight | 2,400 lb (1,100 kg) | 2,400 lb (1,100 kg) |
| DIMENSIONS AND WEIGHTS | | |
| Length standard | 166 in (422 cm) | 195 in (495 cm) |
| Length with net | 195 in (495 cm) | NA |
| Length with ramp | 195 in (495 cm) | NA |
| Height | 117 in (297 cm) | 117 in (297 cm) |
| Width with standard tires | 114 in (290 cm) | 129 in (328 cm) |
| Width with optional tires | 129 in (328 cm) | NA |
| Tires | Standard: 14L-16.1; Optional: 21.5L-16.1 flotation tire | 21.5L-16.1 flotation tire |
| Weight fully optioned | 8,600 lb (3,900 kg) | 8,600 lb (3,900 kg) |
| BALE FORMING CHAMBER | | |
| Drive roller size | 5.5 in (14 cm) | 5.5 in (14 cm) |
| Drum roller size | 12 in (30 cm) | 12 in (30 cm) |
| Idler roller size | 3.5 in, 4.8 in, 5.5 in (8.9 cm, 12 cm, 14 cm) | 3.5 in, 4.8 in, 5.5 in (8.9 cm, 12 cm, 14 cm) |
| Start roller size | 4.5 in (11 cm) | 4.5 in (11 cm) |
| Belt type | Premium mini rough top | Premium mini rough top |
| Number of belts | 8 | 8 |
| Width of belt | 6.8 in (17 cm) | 6.8 in (17 cm) |
| Length of belt (long) | 540 in (1,370 cm) | 540 in (1,370 cm) |
| Length of belt (short) | 533 in (1,350 cm) | 533 in (1,350 cm) |
| Type of lace | Alligator rivet | Alligator rivet |
| Silage kit | Optional | Optional |
| DRIVE SYSTEM | | |
| Driveline | 540 rpm, standard lube, friction clutch or 1,000 rpm, cutout clutch | 1,000 rpm, extended lube, cutout clutch |
| Torque protection pickup | Radial pin clutch or friction with slip-sensing | Friction with slip-sensing |
| Roller chains | Single 50, 60 and 80 | Single 50 (60, 80 — O-ring) |
| Bearing and sprocket configuration | Hex shaft and bearings | Hex shaft and bearings |
| TRACTOR REQUIREMENTS | | |
| PTO horsepower minimum | 80 hp (60 kW) | 150 hp (110 kW) |
| PTO horsepower recommended | 100 hp (70 kW) | NA |

| SPECIFICATION | 605N BALER | 605N CSS BALER |
|---------------------------------|--|--|
| PICKUP | | |
| Pickup type | Cammed wide | Cammed wide |
| Width tooth to tooth | 77 in (200 cm) | 77 in (200 cm) |
| Width on outside flair | 90 in (230 cm) | 90 in (230 cm) |
| Tooth bars | 10 | 10 |
| Number of teeth | (65) double rubber mounted | (65) double rubber mounted |
| Teeth spacing | 3-1/16 in (7.8 cm) | 3-1/16 in (7.8 cm) |
| Stripper bands | Steel | Steel |
| Flotation | Gauge wheels 7.1 - 16 HD semi-pneumatic with spring assist | Gauge wheels 7.1 - 16 HD semi-pneumatic with spring assist |
| Pickup lift | Hydraulic | Hydraulic |
| CONTROL SYSTEM | | |
| Control system type | E-Link Pro display | E-Link Pro display |
| Display | 7-in (18-cm) color touch screen | 7-in (18-cm) color touch screen |
| Field statistics | 20 customers with 10 fields each | 20 customers with 10 fields each |
| Field statistics download | USB | USB |
| Bale shape indicators | Standard | Standard |
| Moisture | Standard up to 27% | Standard up to 27% |
| Bales per hour | Standard | Standard |
| DENSITY | | |
| Bale density adjustments | Standard | Standard |
| Density readings | Physical gauge | Physical gauge |
| Cylinder size | 3 in (8 cm) | 3 in (8 cm) |
| BALE TIE SYSTEM | | |
| Twine system | Optional | NA |
| Netwrap system | Optional | Standard |
| Net tension control | Via mechanical adjustment | Via mechanical adjustment |
| Extra roll storage | Standard | Standard |
| FEATURES | | |
| Bale ramp | Optional hydraulic | Standard hydraulic; Optional Inline® ramp |
| Auto Lube greasing system | Optional | Standard |
| Grease bank | Standard | NA |
| Automatic chain lube system | Optional | Optional |
| Right-hand door | Standard | Standard |
| LED maintenance lights | Optional | Standard |
| Fire extinguisher, safety chain | Optional | Optional |
| Scale kit | Optional | Standard |

| SPECIFICATION | 504 PRO G4 BALER | 604 PRO G4 BALER |
|------------------------------------|---|---|
| BALE SIZE | | |
| Bale diameter | 36 in - 60 in (91 cm - 150 cm) | 36 in - 72 in (91 cm - 180 cm) |
| Bale width | 48 in (120 cm) | 48 in (120 cm) |
| Maximum bale weight | 2,400 lb (1,100 kg) | 2,400 lb (1,100 kg) |
| DIMENSIONS AND WEIGHTS | | |
| Length standard | 205 in (521 cm) | 213 in (541 cm) |
| Length with net | 205 in (521 cm) | 213 in (541 cm) |
| Length with ramp | 205 in (521 cm) | 213 in (541 cm) |
| Height | 120 in (305 cm) | 120 in (305 cm) |
| Width with standard tires | 112 in (284 cm) | 112 in (284 cm) |
| Tires | 21.5L-16.1 flotation tire | 21.5L-16.1 flotation tire |
| Weight fully optioned | 10,250 lb (4,600 kg) | 10,500 lb (4,800 kg) |
| BALE FORMING CHAMBER | | |
| Drive roller size | 7.1-in (18-cm) rubber and (1) 6.6-in (17-cm) steel | 7.1-in (18-cm) rubber and (1) 6.6-in (17-cm) steel |
| Drum roller size | 9.5 in (24 cm) | 9.5 in (24 cm) |
| Idler roller size | 4.5 in, 6.6 in (11 cm, 17 cm) | 4.5 in, 6.6 in, 9.5. in (11 cm, 17 cm, 24 cm) |
| Start roller size | 8 in (20 cm) | 8 in (20 cm) |
| Belt type | Endless belts | Endless belts |
| Number of belts | 4 | 4 |
| Width of belt | 11.2 in (28 cm) | 11.2 in (28 cm) |
| Length of belt (long) | 433 in (1,100 cm) | 472 in (1,200 cm) |
| Type of lace | No laces | No laces |
| DRIVE SYSTEM | | |
| Driveline — standard | 540 rpm, standard lube, cut-out clutch | 540 rpm, standard lube, cut-out clutch |
| Driveline — optional | 1,000 rpm, standard lube, cut-out clutch | 1,000 rpm, standard lube, cut-out clutch |
| Torque protection pickup | Radial pin clutch | Radial pin clutch |
| Roller chains | Single 60, 80, 100 and double 80 | Single 60, 80, 100 and double 80 |
| Bearing and sprocket configuration | Round and hex drive shafts, greasable roller bearings | Round and hex drive shafts, greasable roller bearings |
| TRACTOR REQUIREMENTS | | |
| PTO horsepower minimum | 80 hp (60 kW) | 90 hp (70 kW) |
| PTO horsepower recommended | 110 hp (82 kW) | 120 hp (90 kW) |

| SPECIFICATION | 504 PRO G4 BALER | 604 PRO G4 BALER |
|---------------------------|---|---|
| PICKUP | | |
| Pickup type | Camless wide | Camless wide |
| Width tooth to tooth | 73 in (190 cm) | 73 in (190 cm) |
| Width on outside flair | 78 in (200 cm) | 78 in (200 cm) |
| Tooth bars | 5 | 5 |
| Number of teeth | (75) double rubber mounted | (75) double rubber mounted |
| Teeth spacing | 2.5 in (6.4 cm) | 2.5 in (6.4 cm) |
| Stripper bands | Poly | Poly |
| Flotation | Gauge wheels 7.10-16 HD semi-pneumatic with spring assist | Gauge wheels 7.10-16 HD semi-pneumatic with spring assist |
| Pickup lift | Hydraulic | Hydraulic |
| 3-year pickup warranty | Standard | Standard |
| CONTROL SYSTEM | | |
| Control system type | Atlas Pro™ control system | Atlas Pro™ control system |
| Display | 7-in (18-cm) color touch screen | 7-in (18-cm) color touch screen |
| Field statistics | 50 fields with names | 50 fields with names |
| Field statistics download | USB | USB |
| Bale shape indicators | Standard | Standard |
| Bales per hour | Standard | Standard |

| SPECIFICATION | RANCHER 6650 BALER |
|------------------------------------|---|
| BALE SIZE | |
| Bale diameter | 36 in - 66 in (91 cm - 170 cm) |
| Bale width | 61 in (150 cm) |
| Maximum bale weight | 1,700 lb (770 kg) |
| DIMENSIONS AND WEIGHTS | |
| Length standard | 160 in (410 cm) |
| Length with net | 181 in (460 cm) |
| Length with ramp | 171 in (434 cm) |
| Height | 111 in (282 cm) |
| Width with standard tires | 109 in (277 cm) |
| Tires | 31x13.5-15 |
| Weight fully optioned | 5,850 lb (2,650 kg) |
| BALE FORMING CHAMBER | |
| Drive roller size | 5.5 in (14 cm) |
| Drum roller size | 12 in (30.5 cm) |
| Idler roller size | 3.5 in, 4.8 in (8.9 cm, 12.1 cm) |
| Start roller size | 4.5 in (11 cm) |
| Belt type | Standard mini rough top |
| Number of belts | 8 |
| Width of belt | 6.8 in (17 cm) |
| Length of belt (long) | 492 in (1,250 cm) |
| Length of belt (short) | 482 in (1,220 cm) |
| Type of lace | Alligator rivet |
| DRIVE SYSTEM | |
| Driveline | 540 rpm, standard lube, friction clutch |
| Torque protection pickup | Radial pin clutch |
| Bearing and sprocket configuration | Round drive shafts and bearings — hex shaft on drum |
| TRACTOR REQUIREMENTS | |
| PTO horsepower minimum | 60 hp (45 kW) |
| PTO horsepower recommended | 75 hp (56 kW) |

| SPECIFICATION | RANCHER 6650 BALER |
|---------------------------------|-----------------------------------|
| PICKUP | |
| Pickup type | Standard |
| Width tooth to tooth | 57 in (140 cm) |
| Width on outside flair | 72 in (180 cm) |
| Width of Haysaver wheels* | 87 in (220 cm) |
| Tooth bars | 5 |
| Number of teeth | (50) double rubber mounted |
| Flotation | Spring assist |
| Pickup lift | Manual |
| CONTROL SYSTEM | |
| Control system type | Bale Expert™ |
| Display | Monochrome LCD screen |
| Bale shape indicators | Standard |
| Moisture | Standard up to 27% |
| DENSITY | |
| Bale density adjustments | Manual adjustment on relief valve |
| Density readings | Physical gauge |
| Cylinder size | 2.5 in (6.4 cm) |
| BALE TIE SYSTEM | |
| Twine system | Optional |
| Netwrap system | Optional |
| Net tension control | Via mechanical adjustment |
| Extra roll storage | Standard |
| FEATURES | |
| Bale ramp | Optional spring loaded |
| LED maintenance lights | Optional |
| Fire extinguisher, safety chain | Optional |
| Scale kit | Optional |



Vermeer Corporation
1410 Vermeer Road East
Pella, Iowa 50219
800-370-3659 • vermeer.com

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation.

Equipment and depictions shown are for illustrative purposes only and may display optional accessories or components specific to their global region. Please contact your local Vermeer dealer for more information on machine specifications.

Vermeer, the Vermeer logo, Atlas, Atlas Pro, the Black, White and Green bale wrap color scheme (Vermeer Net), Bale Expert and Inline are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries.

© 2024 Vermeer Corporation. All Rights Reserved.

LF 24-00629 08/22 (VM) / PN#510505093

BALERS